

GAS-TIGHT PREMIUM CONNECTION UPJ TUBING – ISO 11960/API 5CT

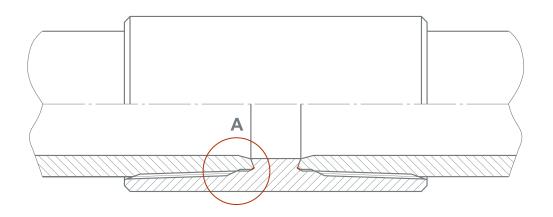

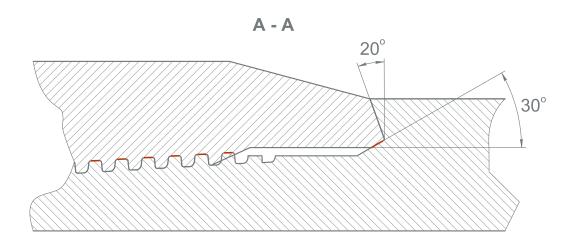

2 3/8" - 2 7/8" 8 threads per inch

R 0.56_{-0.025}

10⁵±1°


3.175

1.578^{+0.076}
1.578_{-0.076}

R 0.152_{-0.025}

R 0.152^{+0.025}

R 0.56^{+0.025}

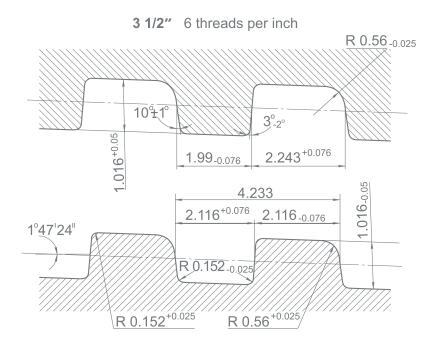

Sizes, masses, wall thickness:

Size designation	Outside diameter		Wall thickness		Weight		Charles and a
	in	mm	in	mm	lb/ft	kg/m	Steel grade
2 ¾	2.375	60.320	0.190	4.830	4.442	6.610	N80(1), N80(Q), L80(1), P110
2%	2.875	73.020	0.217	5.510	6.162	9.170	N80(1), N80(Q), L80(1), P110
			0.276	7.010	7.667	11.410	N80(1), N80(Q), L80(1), P110
3 ½	3.500	88.900	0.216	5.490	7.587	11.290	N80(1), N80(Q), L80(1), P110
			0.254	6.450	8.816	13.120	N80(1), N80(Q), L80(1), P110
			0.289	7.340	9.918	14.760	N80(1), N80(Q), L80(1), P110
			0.375	9.520	12.526	18.640	N80(1), N80(Q), L80(1), P110
4	4.000	101.600	0.226	5.740	9.119	13.570	N80(1), N80(Q), L80(1), P110
4 1/2	4.500	114.300	0.271	6.880	12.250	18.230	N80(1), N80(Q), L80(1), P110
			0.290	7.370	13.070	19.450	N80(1), N80(Q), L80(1), P110